



## Hardtop Hoist Bracket Kit Installation Instructions

### Kit Includes:

- 2x Hinge Brackets (1 left & 1 right)
- 2x Short Rear Hoist Straps w/ HK Style Snap Hook
- 1x Long Front Hoist Strap w/ 1" S-Hook

### Tools Needed:

- 10mm Socket

### Install Rear Straps on Racor® Hoist (Only work on one side at a time.)

First, make sure you have securely installed the Racor Lift according to the manufacturer's instructions. And also make sure the support bars on the platform are running side to side over the Jeep top, NOT front to back.

1. On the side of the RACOR® Rack that would face the rear of the Jeep, remove nut from outermost J-bolt near the eye-bolt and then remove J-bolt.
2. Next, remove bottom nut on the pulley cable eye-bolt and then remove it from platform support. (You may need an extra hand to support the platform during this step)
3. Slide one of the shorter Topsy hoist strap over platform support bar past the 2 bolt holes and in about 12 inches from the end.
4. Reinstall the cable eye-bolt and J-bolt.

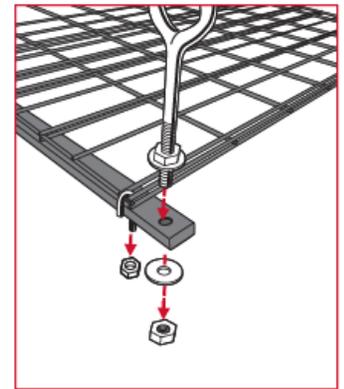


Fig. A

Repeat steps on other side

### Install Hinge Bracket on Jeep Top: (Again, ONLY work on one side at a time!)

1. Open rear glass window. If working on the left side hinge, you may find it easier to remove the rear wiper motor cover to access the bolts on the left side. It just snaps on, so just pull it straight off.
2. Loosen the 2 mount bolts that connect the hinge to the hard top. They only need to be backed out about ¼" or about 10 turns.
3. Next, slide the hinge bracket up under the mount bolts, but outside of the hinge. Make sure it's pushed up tight against the 2 mount bolts.
4. Now tighten the 2 mount bolts. (The torque spec is 90 in/lbs. or 10 N·m)

Repeat the steps on the other side.

### Hoist the Top Off:

1. Remove all necessary fasteners of the hard top as indicated by the vehicles owners manual.
2. Attach the long strap to the eye-bolt on one side of the front of the RACOR Rack.
3. Run it under the top, though the Jeep.
4. In the rear, Clip the 2 short straps to the hinge hangers brackets.
- 5 Crank it up! Your top is now off. Go out and play topless.